


Universal Care Rail Showers


INVERTED T RAIL SHOWER AND RAIL SHOWER

444117 | 444117-P | 444119 | 444119-P


WELS 3 Star rated, 9L/min

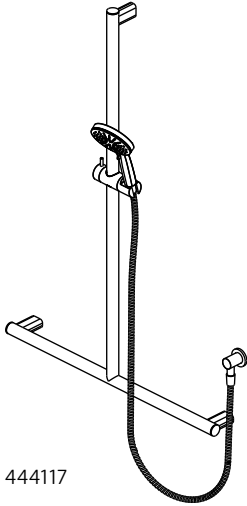


444117

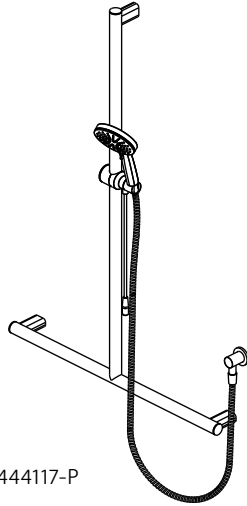

444117-P

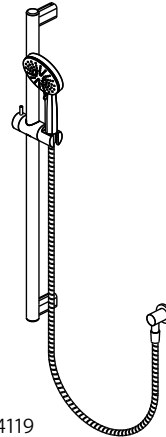

444119

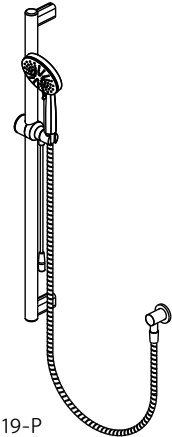

444119-P

IMPORTANT: Please read all of the instructions before installation. Check the product thoroughly for damage. Installation is acceptance of goods supplied and will void warranty. This product is pre-assembled. Do not disassemble, as this may void the warranty.

Specifications

Please refer to fienza.com.au for the latest product specifications before installing.

Operating Pressure	Min: 150kPa/1.5bar Max: 500kPa/5.0bar Optimum: 150kPa/1.5bar - 500kPa/5bar Installation of pressure limiting valve recommended if supply exceeds 500kPa
Operating Temperature	Hot: Max 80°C Cold: Min. 5°C
Inlet Connections	1/2" BSPP
Suitable Hot Water Units	Storage tank and continuous flow only. Not suitable for gravity feed.

General Information

- This product must be installed by a qualified licensed plumber in accordance with AS/NZS 3500 and all applicable local regulations and plumbing codes.
- All pipe work must be thoroughly flushed prior to installation.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation all hoses and connections must be checked for leaks.
- It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface.







Installation

IMPORTANT:

- Before commencing installation, turn off the water supply. While not essential, we recommend fitting isolation valves to both the hot and cold-water supply.
- If the Push/Pull Slider is being used on the shower support rail, it must be installed onto the rail before the rail is mounted to the wall.
- Some shower heads only operate correctly when hot and cold water supplies are both mains pressure and may not be suitable for some instantaneous hot water services.
- When water pressure is in excess of 500kPa a pressure limiting device is required.
- Some showers may not provide an effective shower when used with gravity fed heated water systems or where pressures are less than 150kPa at the outlet. Additionally, showers with flow rates of less than 9L/min may not allow the following to function correctly:
 - Some instantaneous water heaters
 - Some tempering valves
 - Some thermostatic mixing valves

Installation for MST119 Care Push/Pull Slider



- To install the Push-pull slider you will need a large flat head screwdriver, a soft cloth and a 3mm Allan key.
- Open the package and check the parts are all there.
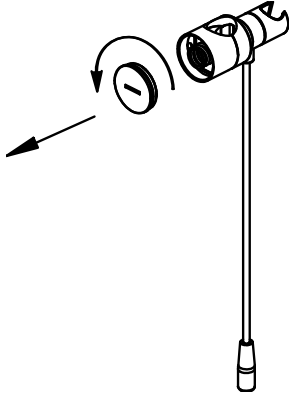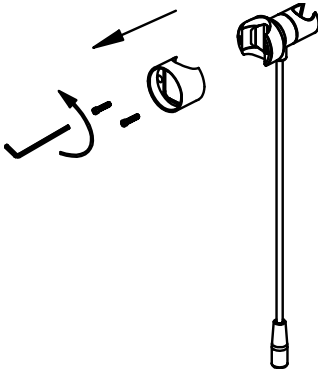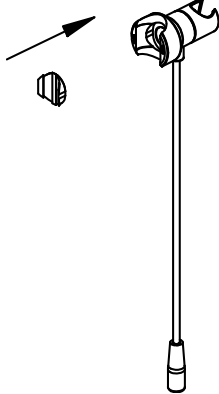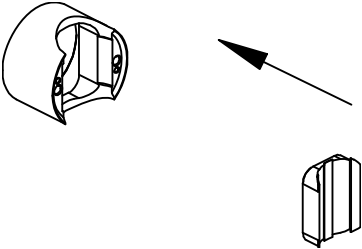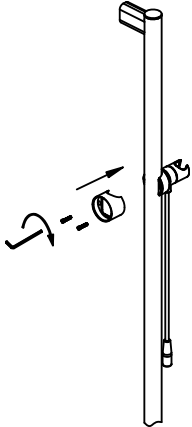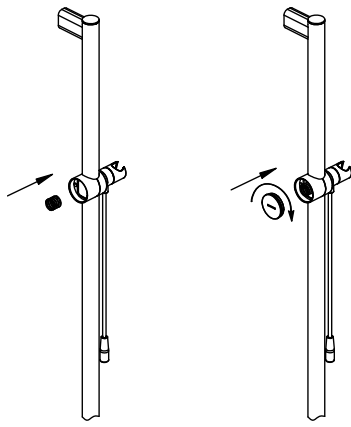
<p>1. Using the screwdriver unscrew the top cap from the side of the slider. (Tip to avoid scratching the product use a soft cloth between the screwdriver head and the top cap).</p>	<p>2. To separate the slider, use a 3mm Allan key to unscrew the two hex screws inside the slider.</p>	<p>3. Place the round plastic spacer into the slider body with handle.</p>
		
<p>4. Place the rectangle plastic spacer in the opposite side of the slider.</p>	<p>5. Join both parts of the slider back together around the shower rail and secure using the 2 hex screws. Do not over tighten as the slider must be able to move up and down the rail.</p>	<p>6. Put the fixing spring in the top cap and screw the top cap back onto the slider body.</p>
		

7. The cap should be screwed onto the slider body until fully seated, do not overtighten.

8. Test that the slider can be pushed and pulled up and down the rail using the handle. If it is too tighten loosen the top cap until the slider can move up and down the shower rail.


9. Install the Shower Support Rail onto the wall using the 444117 & 444119 Installation guide.

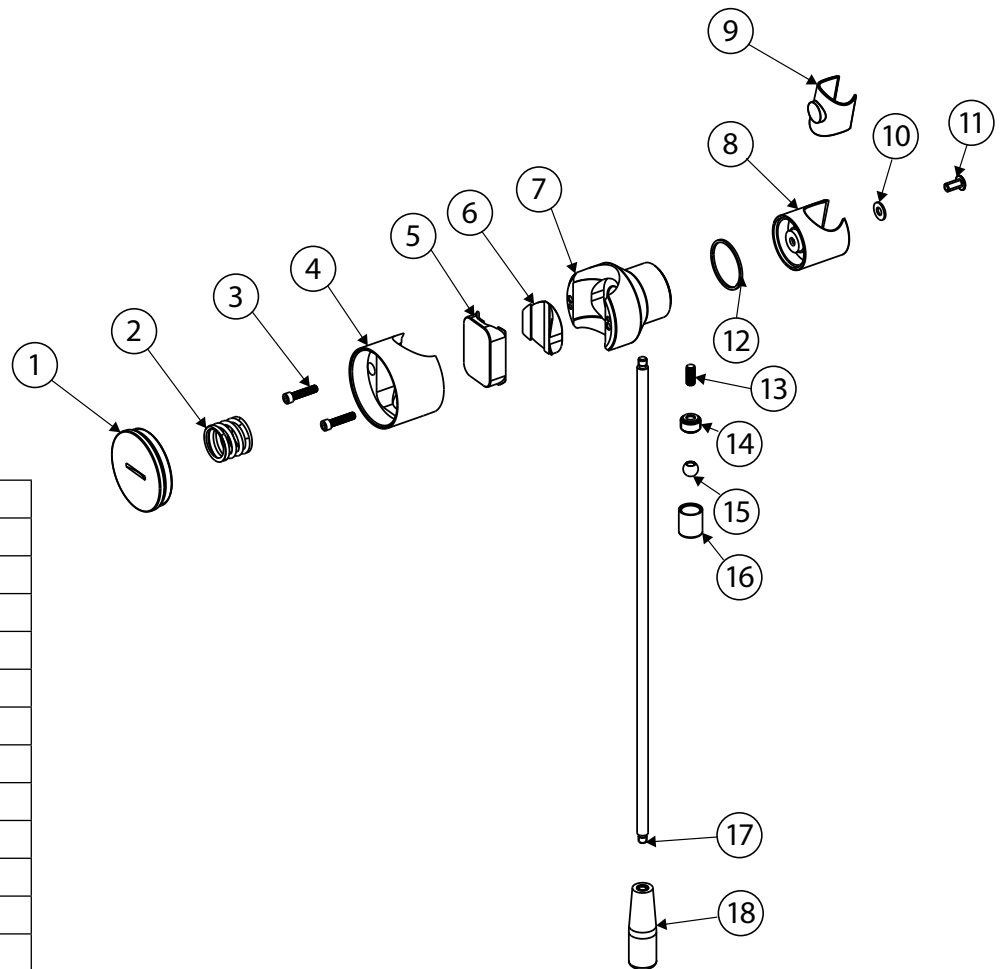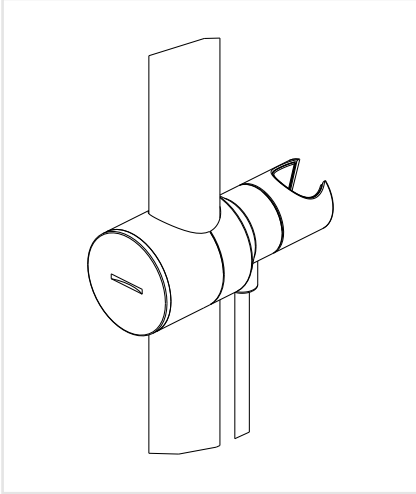


1	Cap
2	Spring
3	Screw
4	Seat
5	Plastic Protector
6	Plastic Protector
7	Main Body
8	Holder
9	Plastic Protector
10	Gasket
11	Screw
12	Wear Ring
13	Screw
14	Connector
15	Putter Head
16	Push Rod
17	Pushbeam
18	Handle

Installation for the Shower Support


1. Determine the location on the wall where the shower support rail will be installed.

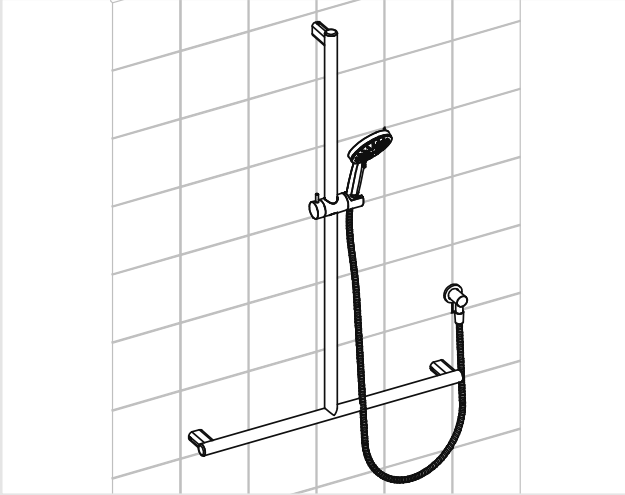


2. Remove the fixing brackets from inside the mounting arms by loosening the grub screws.

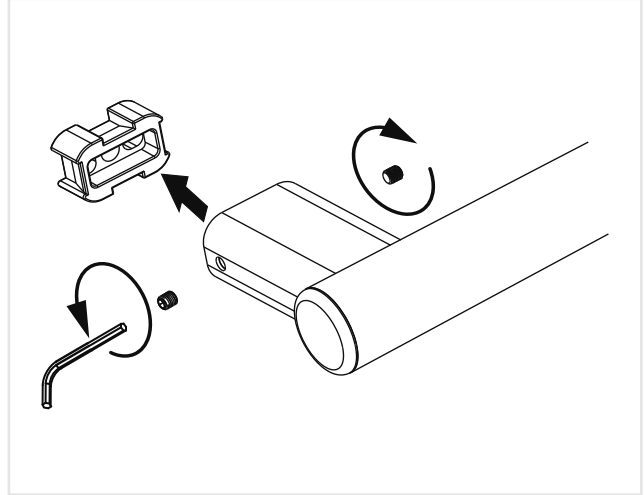


3. For the T-Bar shower Rail 444117, join the rail together at the centre fixing point and fasten the grub screw by using the Allan key provided.

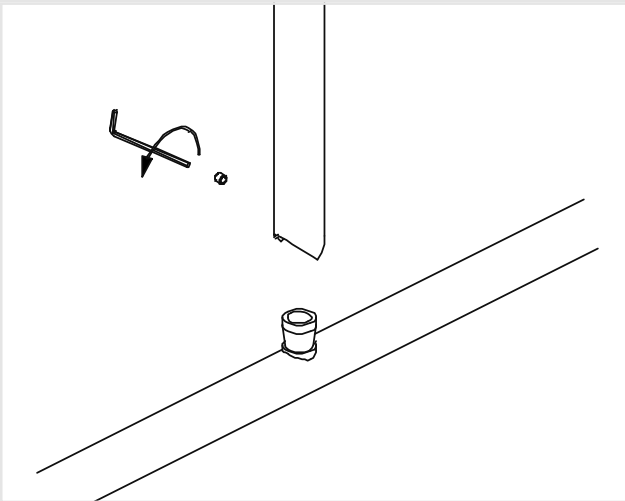


4. Place the shower support rail up against the wall with the mounting arms facing onto the wall. Using a level make sure the marked positions are straight and level.

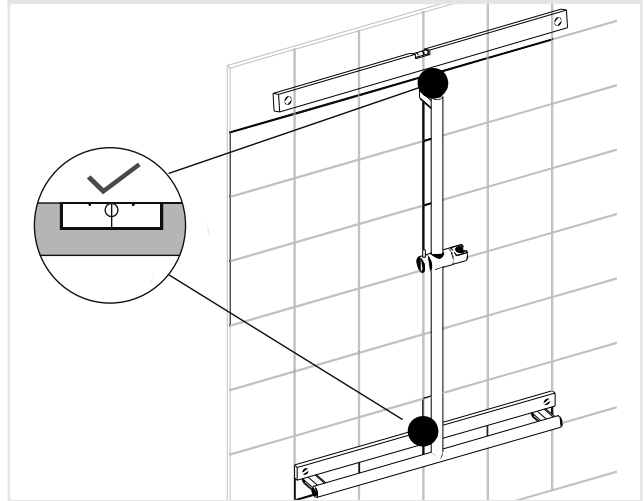


5. Using a pencil, trace the area around the mounting arms to mark the mounting spot. Remove the shower support rail from the wall.

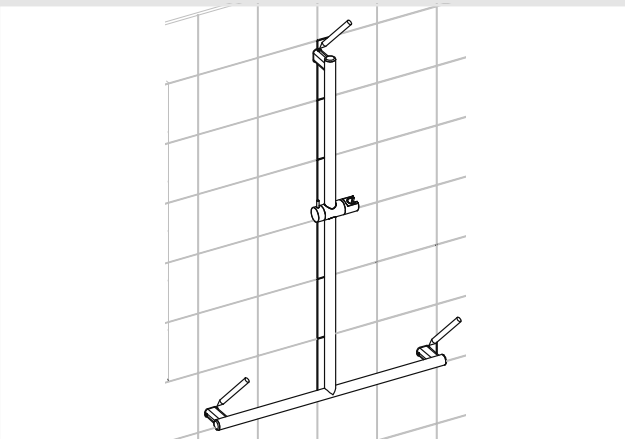


6. Place the fixing brackets in the centre position inside the traced area drawn on the wall and mark the drill.

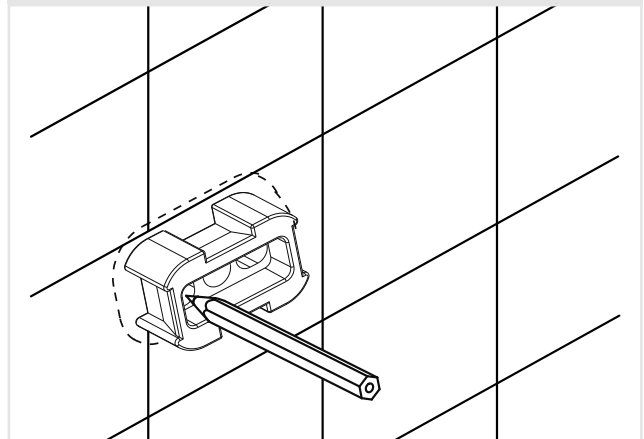


- 7.** For fixing to brickwork, blockwork or concrete, using the correct drill bit, drill 8mm holes 60mm deep into the wall.

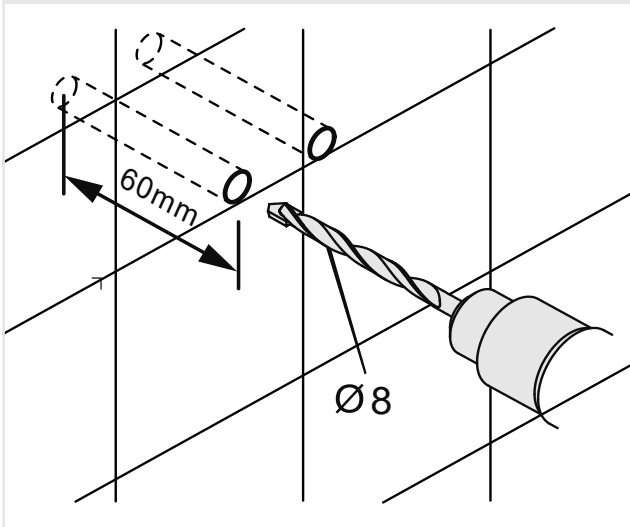


- 8.** Insert suitable wall plugs into drilled holes. Ensure plugs are flush with rail.

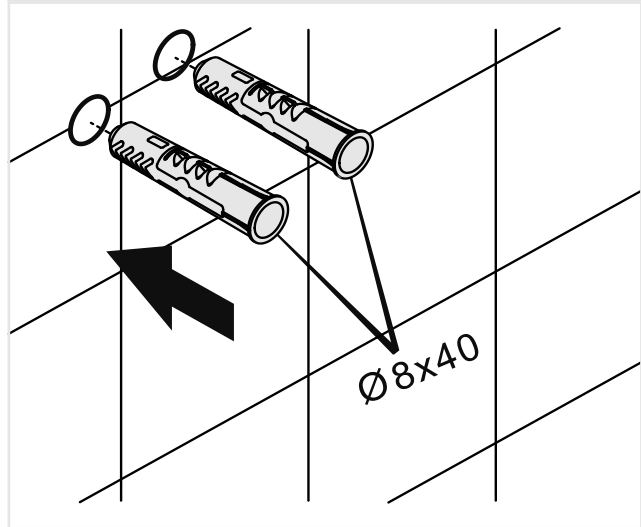

- 9.** Using the 304 stainless steel screws provided, attach the mounting brackets securely to the wall.

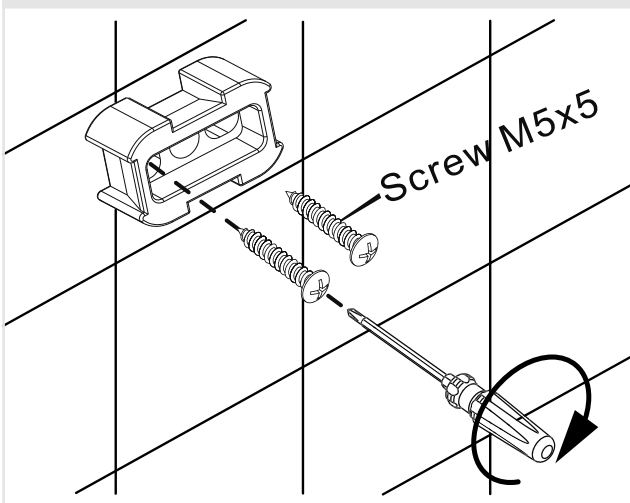


- 10.** Slide the shower support rail mounting arms over the fixing brackets on the wall and secure the rail by tightening all the grub screws.

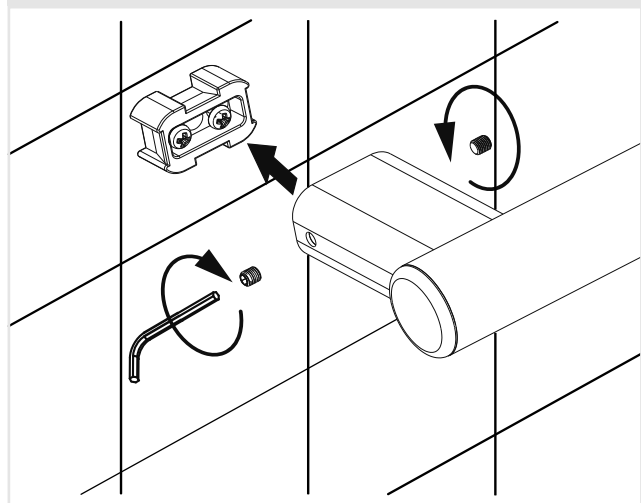


Installation for the Hand Shower


1. Recommended minimum height 1000mm from floor level to top water inlet position.

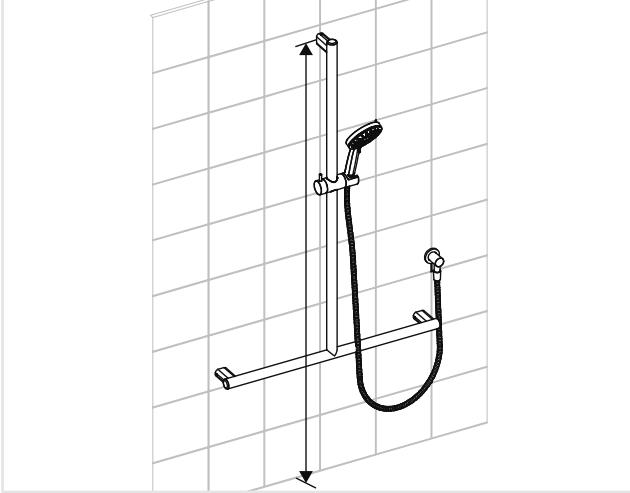


2. Install a 1/2" male threaded connection at the appropriate height on wall, ensuring that a minimum of 13+2mm of thread protrudes past the finished wall. Correct water proofing must be applied.

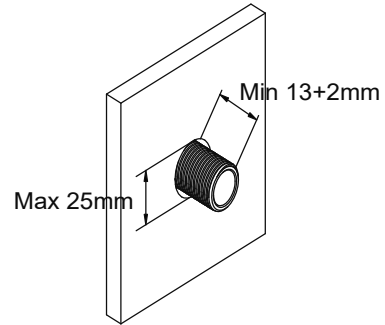

3. Insert the water inlet into rosette.

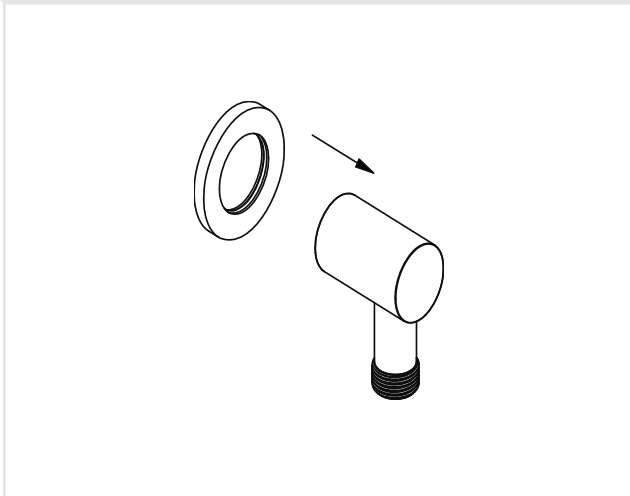


4. Apply thread tape (or similar) to the 1/2" connection, then screw the water inlet connector to the connection.

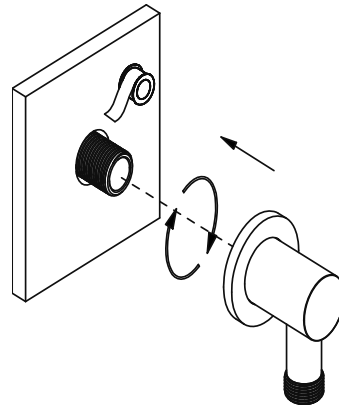

5. Connect the handset and hose.



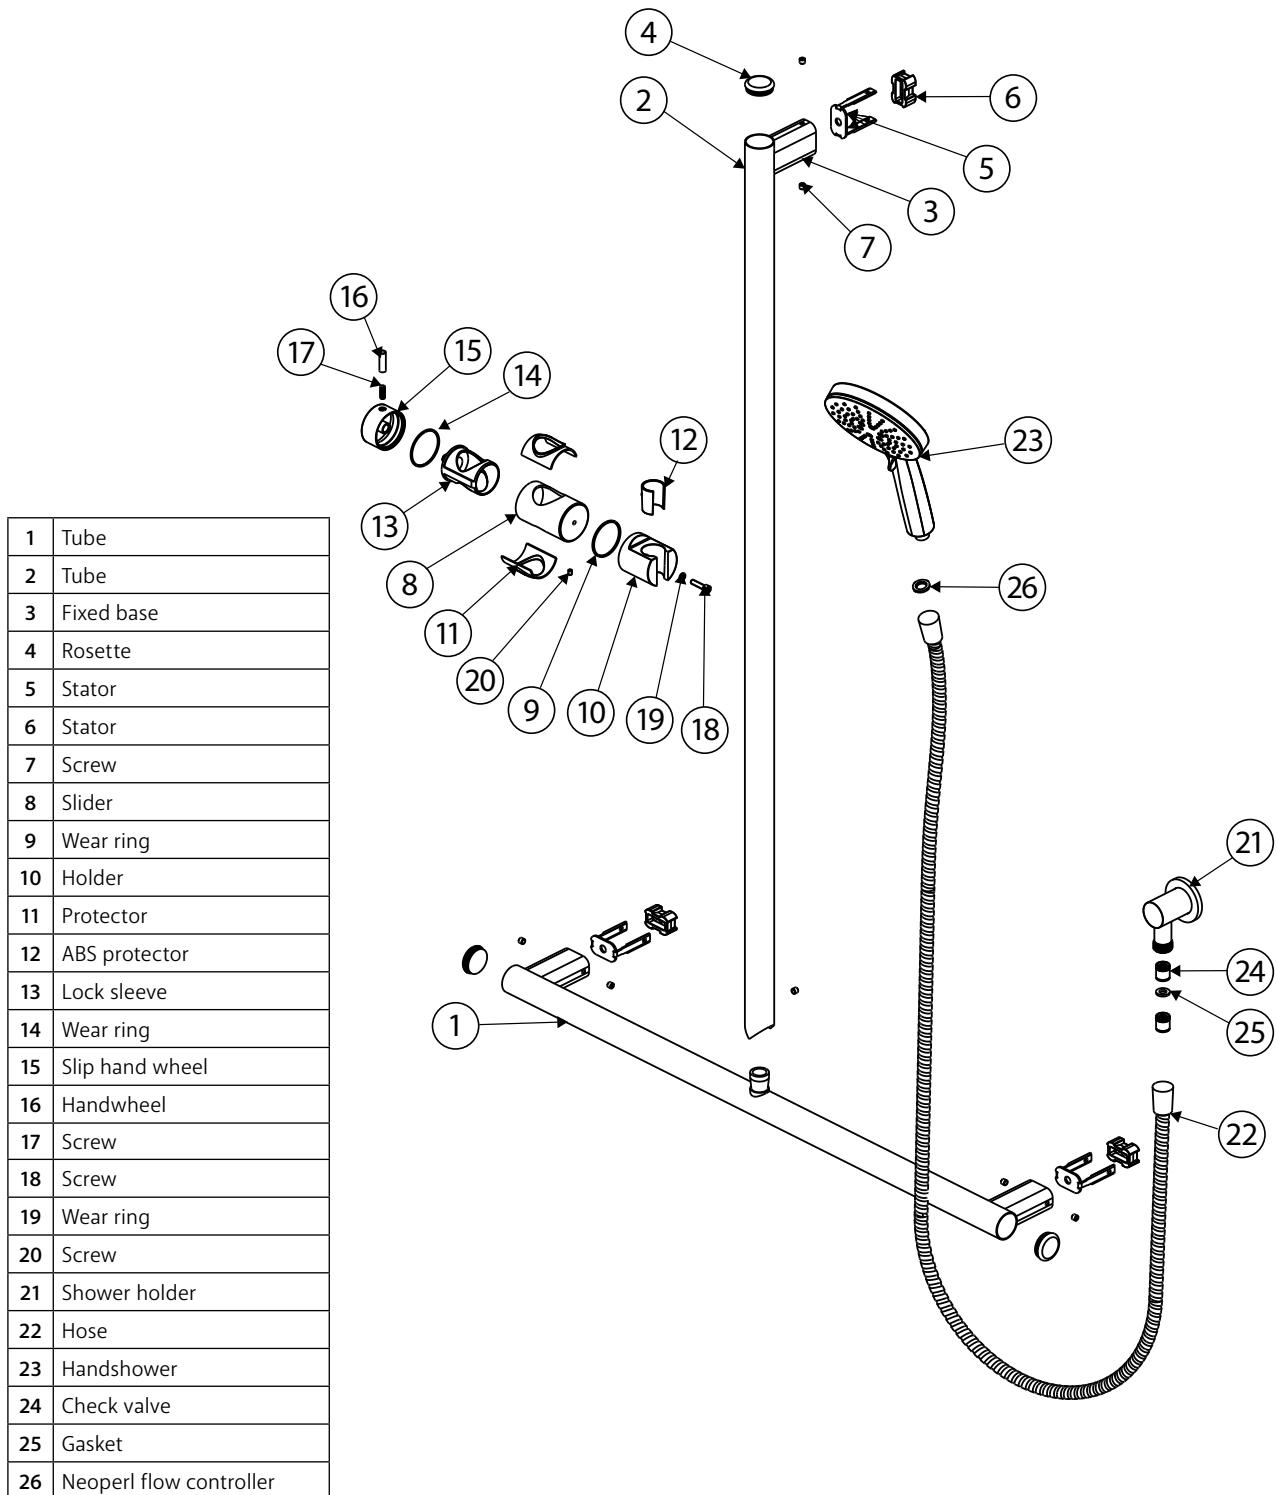

Cleaning & Care

We recommend weekly cleaning with mild soapy water and a microfibre cloth. In highly polluted or coastal locations we recommend cleaning 2-3 times per week. Please note that colour tapware requires more frequent cleaning than chrome tapware.

- Never use harsh detergents, citrus-based cleaners or abrasive cleaners, as these will scratch the surface. Use of unsuitable cleaners may damage the surface and will not be covered by warranty.
- Where your tapware remains dry in use, a non-abrasive soft cloth can be used to remove surface dust.
- Use of wax-based furniture creams should be avoided as these can result in a build-up of deposits which can effect the appearance.
- Do not use undue pressure and wipe in one direction only.

Warranties

Residential Warranty Periods

Applies to domestic uses and applications of Fienza® products, such as private dwellings and retirement villages.

Commercial Warranty Periods

Applies to commercial uses and applications of Fienza® products, including, but not limited to: commercial food premises such as restaurants; commercial accommodation such as hotels; hospitals and healthcare facilities; public amenities; and industrial, laboratory and manufacturing facilities.

Product Component	Residential	Commercial
Rails (Structure Only)	LIFETIME replacement parts or product, 1 year labour on Twin Showers	5 years replacement parts or product, 1 year labour on Twin Shower Rails
Flexible Hoses	1 year replacement parts or product	1 year replacement parts or product
Finishes - Chrome	LIFETIME replacement parts or product	5 years replacement parts or product
Finishes - PVD & Electroplated	5 years replacement parts or product	1 year replacement parts or product
Accessories & Spare Parts	1 year replacement parts or product	1 year replacement parts or product

*Excludes parts subject to general wear and tear such as O-rings, washers and jumper valves. Labour is not included unless otherwise specified.

Australian Consumer Law

Our products come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure upon inspection by an authorised representative where a product is found to be defective in construction, material or assembly. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure, free of charge.

Warranty Conditions

- Installation has been carried out by a licensed plumber in accordance with AS/NZS 3500 and all applicable local regulations and plumbing codes.
- All maintenance and adjustments to the product after the installation have been carried out by a licensed plumber.
- Cleaning and care instructions detailed in this document have been strictly adhered to.
- Proof of purchase is required for warranty claims.

Warranty Limitations

To the extent permitted under the Trade Practices Act and other relevant legislation, Fienza's liability is limited to:

- The cost of replacing the goods, or
- The cost of obtaining equivalent goods, or
- The cost of having the goods repaired
- Fienza is not responsible for any lack of operation or performance of goods (or any loss or damage) where goods are used or adapted for use with other goods not supplied by Fienza.
- It is the responsibility of the customer and installer before installation to ensure that all components are correct and free of obvious visible faults.
- Fienza is not responsible for the labour and rectification costs incurred in the above circumstance.

Conditions for On-Site Warranty Service Calls

Fienza will charge a service fee for each visit to an installation by its technician where it is determined that the fault is due to poorly executed or unlicensed installation work or where the product is not a genuine Fienza product or where the product is outside the warranty period. This may be paid in advance by credit card over the phone to a Fienza technician attending the site and will be refunded if the Fienza product is found to be at fault.

PLEASE LEAVE THIS MANUAL WITH THE END USER

For warranty support, please contact Fienza

15 Walter Cres, Lawnton QLD 4501 PO Box 5381, Brendale QLD 4500

P 07 3490 6700 F 07 3490 6719 E help@fienza.com.au ABN 76 136 411 311

