

# Isabella TWIN STALL URINAL KIT


## Features

- Twin stall flushing system
- Automatic & touch-free
- Ceiling recessed sensor: 128mm diameter x 105mm cutout for retrofit
- Solenoid latching valve supplied with connections
- Variable flush cycle to allow for site requirements
- Battery operated for simple, inexpensive installation
- **WELS 4 Star rated, 1.1L per flush per stall**

Requires Zip FlushMaster Direct Injection Air Break Valve in-water supply line (available separately).



Recommended heights (see drawing below)	
Standard / Adult	610 mm
Junior	500 mm
Persons with Disability	400 mm

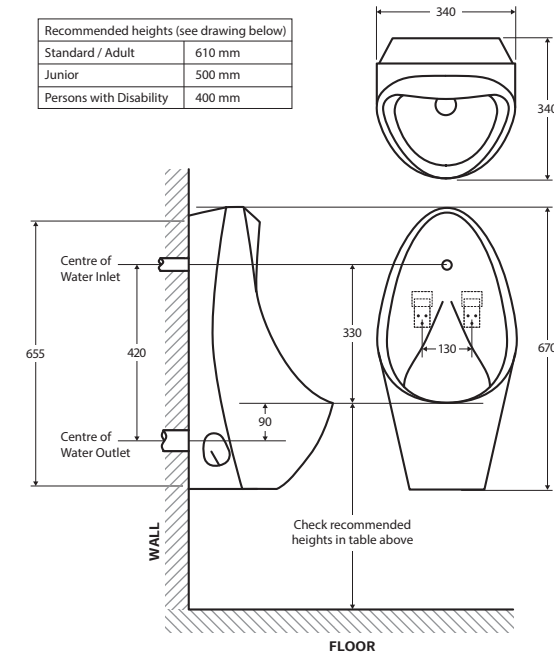

Ceiling sensor.  
128mm diameter x 105mm cutout.



Latching valve with plumbing connections and Zip Restrictaflow water flow restrictor.

## Available in



Gloss White  
**K3040Z-2**

## Cleaning & Care

- Clean only with a soft cloth or sponge using warm water and mild soap or detergent. Do not use any abrasive cleaning materials.
- Do not use any solvents or corrosive liquids.



We aim to ensure that specifications are correct at the time of publication. All measurements are shown in millimetres. For ceramic products, please allow +/- 10 mm tolerance for manufacturing variance. Always use measurements of actual product received for final specification as the technical drawing may contain differences. Due to printing limitations, physical colour may vary from the image shown. Fienza reserves the right to make modifications without prior notice.